



WORM DRIVE C-40





FOOT MODEL

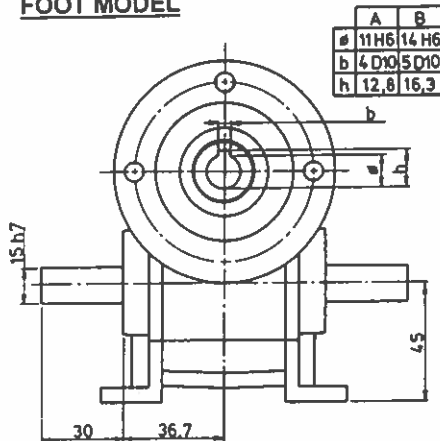


FOOT MODEL

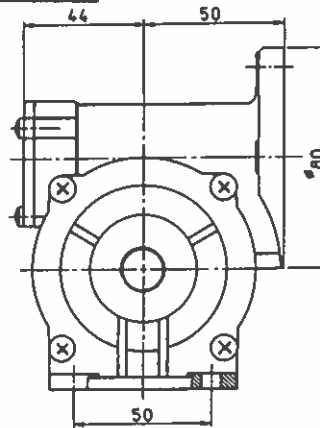





FOOT MODEL

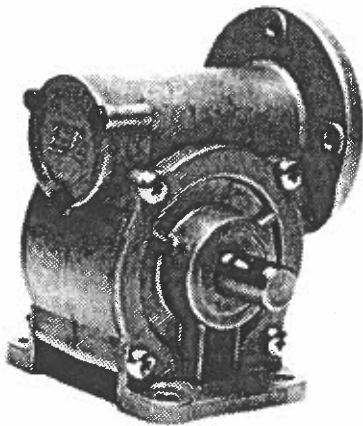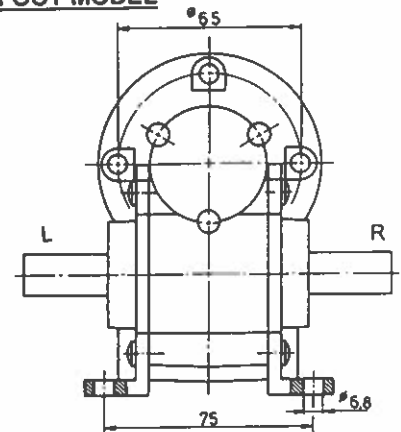

Foot model, longitudinal section

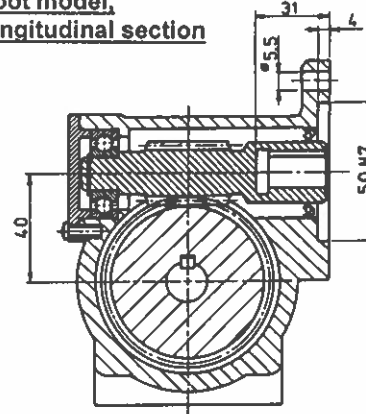

Foot model, cross section

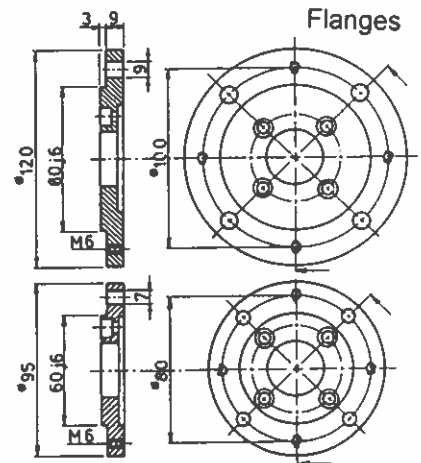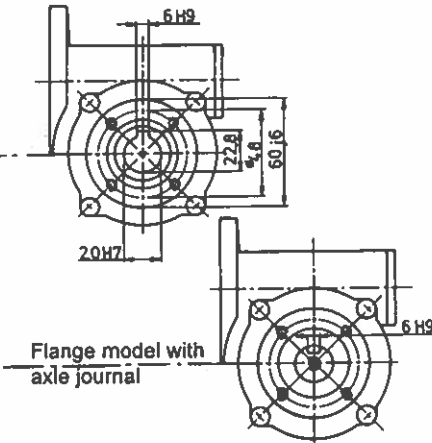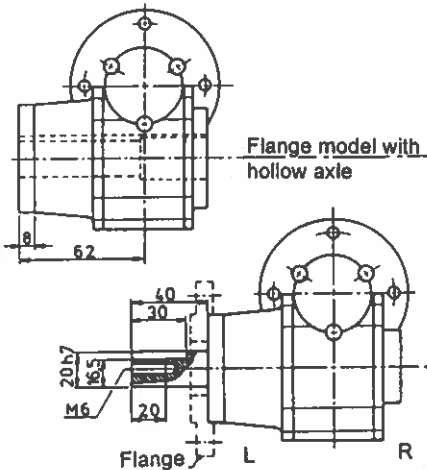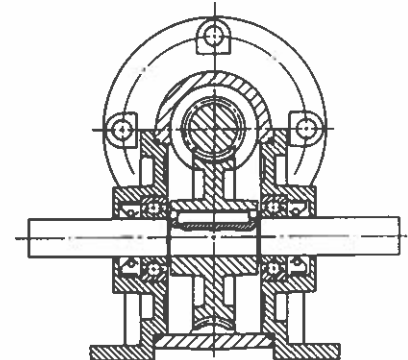

Exchange		6:1	10:1	13:1	15:1	20:1	25:1	30:1	40:1	50:1	60:1	75:1
Efficiency		0,77	0,71	0,70	0,68	0,64	0,60	0,56	0,50	0,49	0,42	0,36
Input 1360 U.min ⁻¹	Kw	0,30	0,30	0,30	0,28	0,23	0,20	0,18	0,14	0,11	0,10	0,08
	Nm	2,1	2,1	2,1	2,0	1,6	1,4	1,3	1,0	0,8	0,7	0,6
Output	Nm	9,7	15,0	19,2	20,1	20,7	21,1	21,2	19,7	18,9	17,7	15,2
	U.min ⁻¹	227	136	105	91	68	54	45	34	27	23	18

The values are advisory (without a security factor).

The values include an operational factor of 1.0 and 80% operation.

Tempered worm and bronze wheels.

With revolutions > 1500 U.min⁻¹ the gear should be installed with the worm down.

Can be delivered in special designs.

Can be delivered with motor (AC,DC).

Right-handed

Left-handed

Two-handed

R

L

R/L

